

Dräger Saver CF – Emergency Escape Breathing Apparatus (EEBA)

The Dräger Saver CF constant flow Emergency Escape Breathing Apparatus allows safe, effective and uncomplicated escape from hazardous environments. Simple to put on and featuring practically automatic operation, this hood-based, positive-pressure breathing device can be used with minimal training.



WHEN TIME IS OF THE ESSENCE

In emergency situations, conditions can deteriorate rapidly. The air is suddenly filled with smoke or toxic fumes and rapid escape is the only available option. The Dräger Saver CF is highly visible and was designed to be suitable even for people with spectacles or facial hair. When opened, the Dräger Saver CF is automatically activated and begins feeding a continuous supply of breathing air. The Saver CF gives the wearer the precious additional time needed to exit the area safely.

HIGHLY VISIBLE, EVEN UNDER ADVERSE CONDITIONS

Available with either a soft bag or hard case, the Saver CF can be easily wall-mounted in strategic locations in potentially hazardous areas. Both black anti-static cases or bright orange bags feature photoluminescent panels and reflective stripes for enhanced visibility, even under low lighting conditions. The Saver CF is compact and lightweight and can be worn either as a chest bag or over the shoulder. Made from highly resistant materials, it is washable, flame retardant and allows water to drain freely.

UP TO 15 MINUTES OF LIFESAVING AIR

The Dräger Saver CF utilizes a simple, fail-safe reducer system with excellent flow characteristics, providing a consistent rate of air flow until the cylinder is completely empty. An alarm whistle sounds before the air supply is exhausted. It can be equipped with cylinders which can hold either a 10 or 15 minute supply of air. The flame-retardant hood incorporates a large visor for maximum peripheral vision.

OPTIONS FOR ADDED SAFETY AND DURABILITY

The SE version includes a newly developed elastic neck seal which offers exceptional resistance to the effects of high temperatures, ozone and diesel fumes, which are often found in places such as engine rooms. Standard Dräger Saver CF15 units can also be retrofitted with the SE option. The Saver CF15 CC version utilises a carbon composite cylinder to meet the increasing demand for a lighter weight escape device. Available in the orange bag the Saver CF15 CC offers increased working flexibility with reduced wearer stress.



D-33925-2011

Dräger Saver CF – soft bag



D-49034-2012

Dräger Saver CF – hard case

Constant flow hood

Wide visor

Natural rubber neck seal or optional
chemical resistant neck seal (SE version)

Document pocket under lid

Reflective strips

Photoluminescent panels

Cylinder contents gauge

D-33944-2011



LOW-MAINTENANCE PROTECTION

The Dräger Saver CF requires very little service or maintenance. A transparent window on both the soft bag and hard case lets you check the cylinder pressure gauge easily without unpacking the unit. You know the Dräger Saver CF is there for you when you need it.


CONFORMS TO RELEVANT STANDARDS AND NORMS

The Dräger Saver CF complies with EN1146:2005, Lloyd's Register Certificate of Fire Approval and Lloyd's Register Certificate of Type Approval. It also complies with SOLAS Chapter II-2, the Marine

Equipment Directive, the Pressure Equipment Directive and ISO 23269-1:2008 and ISO 23269-4:2011. Antistatic versions are also suitable for use in explosive atmospheres (ATEX zone 0).



Dräger Saver CF hard case

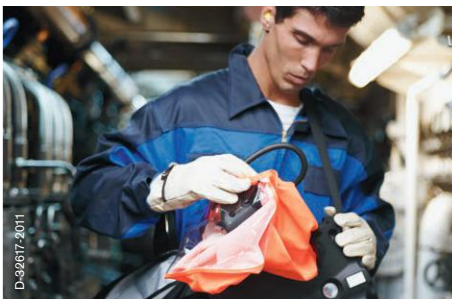

D-92617-2011



D-32756-2011



Dräger Saver CF soft bag

TECHNICAL DATA

	Dräger Saver CF10/CF15	Dräger Saver CF15 CC	
Dimensions (H × L × T)	260 × 510 × 190 mm	260 × 560 × 190 mm	
Cylinder charging pressure		200 bar	
Airflow to the hood		35 – 37 L/min	
Operating temperature range		-15 °C to +60 °C	
Approvals	EN1146:2005, ISO 23269-1:2008, ISO 23269-4:2011, SOLAS Chapter II-2, the Marine Equipment Directive and the Pressure Equipment Directive. The Dräger Saver CF hard case and anti-static soft bag versions are suitable for use in explosive atmospheres (ATEX zone 0).		
	CF10	CF15	CF15 CC
Weight (Kg) including cylinder			
Hard case	5.9 kg	6.9 kg	–
Soft bag	4.2 kg	5.2 kg	4.5 kg
Cylinder	2 L 200 bar (Aluminium)	3 L 200 bar (Steel)	3 L 200 bar (Carbon composite)

ORDER INFORMATION

Dräger Saver CF

Saver CF10	R 45 003
Saver CF15	R 45 002

Accessories


Saver waistbelt	3350396
Security tab	3350388
Wall mounting kit for carry case	3350431
Carry case	3350424
Storage wall box	3351823
Wall bracket (for hard case versions)	3360516

Safety Wash

– 1 litre dispenser	3380164
– 1 litre refill	3380165
– 5 litre dispenser	3380166
– 5 litre refill	3380167

ās
ahjar safety

Dräger



MICROPACK
FIRE & GAS

Head Office

Ahjar Safety
Street 81
Misfa industrial Area
Muscat
Tel:+968-24437157
Fax:24437158

www.ahjarsafety.com

Email: safety@ahjartech.om